

ES-200-77

Attachable SBC Integrated System Box with Intel® Pentium® III processor



CE FCC UL

Features

- Fits with Advantech SBC board-PCM-9577F
- Built-in 180 watt power supply
- One PC/104 card or one half-length PCI card extendible
- Two 3.5" HDDs can be installed
- One built-in slim type CD-ROM
- Multiple I/O interfaces for versatile applications
- Include attachable open-frame mechanical brackets with OFPC ES-3000 series LCD monitors (ES-3112/ES-3115/ES-3117)

Introduction

ES-200-77 is a system box integrated with Advantech's 5.25, PCM-9577 SBC. This system configuration can accommodate various open-frame LCD monitors to become an open frame PC that is flexible and perfect for kiosk applications.

Networking

Four serial ports and a 10/100Base-T Ethernet controller give the ES-200-77 series advanced networking capability and provides the best solution for versatile applications

Extended Capability

ES-200-77 is designed with one expansion slot for PCI card, two USB ports, one PC/104 card, two 3.5" HDDs and multiple display size monitors can be attached in an OFPC configuration. With these expansion capabilities, the ES-200-77 not only functions as a system box, but also as a computing center to build your application around.

Specifications

- **CPU** Supports Socket 370 for Intel® Celeron™/Pentium® III CPU up to 1.26 GHz
- **Memory** Supports SDRAM PC133 168-pin DIMM x 1, maximum up to 512 MB
- **HDD** 3.5" IDE HDD x 2 supported
- **CD-ROM Drive** Slim type Compact 24X or above
- **Combo Drive** Slim type Compact 24X/10X/24X and DVD 8X or above.
- **Graphic** VIA® Twister chipset (VT8606) with integrated S3 Savage 4 supports 2D/3D 4x AGP graphics
- **Expansion Interface** One expansion slot for half-size PCI card and PC/104 slot for PC/104 card expansion
- **I/O Ports**
 - 1 x VGA port
 - 1 x parallel port
 - 4 x serial ports : RS-232 3, RS-232/422/485 x 1
 - 2 x USB ports : Supports USB2.0
 - 2 x PS/2 ports : 1 x keyboard and 1 x mouse
 - 1 x RJ-45 port : Supports 10/100Base-T Ethernet
 - 4 x audio port : Supports 1 x line-in/1 x line-out/1 x mic-in/1 x speaker out
 - 1 x DC output: Supports 12 V = 10 A output
- **Dimensions (W x H x D)** 353.6 x 225.6 x 100 mm
- **Weight** 3.4 kg


Power

- **Input Voltage** AC 100 ~ 240 V, 4 - 2 A, 50 ~ 60 Hz
- **Output Voltage** DC 3.3 V = 16.8 A, 5 V = 12 A, 12 V = 10 A, 5 V = 2 A, -12 V = 0.8 A
- **Output Rating** 180 W (including ES-200-77 system box and related DC device)


Environment

- **Operating Temperature** 0 ~ 45° C
- **Storage Temperature** -20 ~ 60° C
- **Humidity** 5 - 95% @ 40° C, non-condensing
- **Shock** 10 G peak acceleration (11 msec duration)
- **EMC Approved** CE FCC
- **Safety Approved** UL

I/O Layout

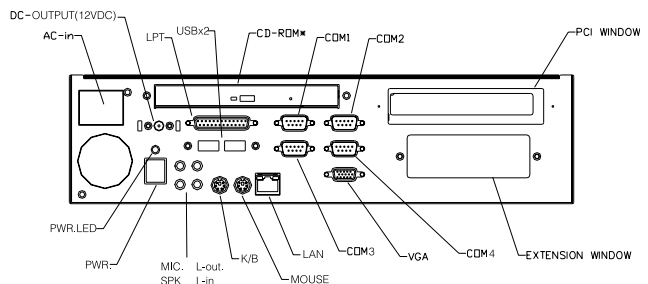

Board Diagram

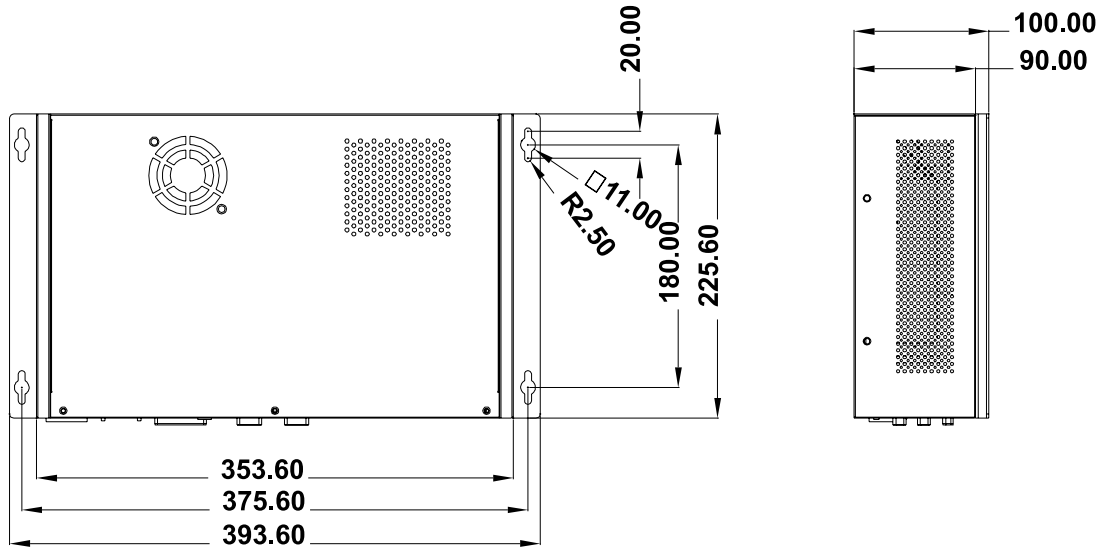

Ordering Information

- **ES-200-77-A2** Attachable 5.25" based SBC integrated system box for Socket 370 compatible Pentium® III CPU